

# GAS ROLLER Model HP11

**Salsco, INC.**  
LEADER BY DESIGN




**MADE IN  
THE U.S.A.**




HP11 Pictured with Top Dressing Brush, Cross Contamination Prevention Kit, Inner Spike-Air Kit & LED Light Kit Options.

We took the #1 Roller in the world and made it better! It has a high performance hydraulic pump, which is where it gets its speed from; up to 11.9 MPH! We doubled the steering ratio and made our roller feel like a sports car. We use larger bearings on the roll housings to increase the life of the rolls. We machine 100% of the rolls outside dimension. Consistency is no longer a concern. Put these new features together with a proven machine and you have one of the finest rollers on the market today. The transport trailer comes standard with the roller, equipped with turf tires to protect the turf, and an extra-long tailgate, with full rubber traction mat and loading guides, for easy loading and transport.

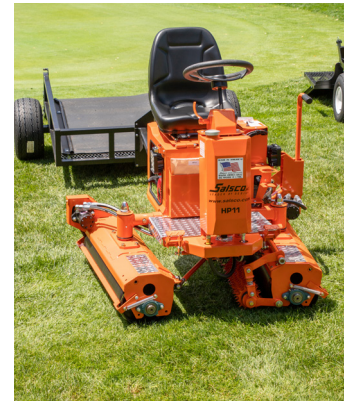


## Variable Speed up to 11.9 MPH!

- 13HP Honda Electric Start Engine
- 36" Rolling Swath
- Ground Pressure - 4.2 P.S.I. without water, 5.6 P.S.I. with water
- Transport Trailer is Standard
- Options: Cross Contamination Prevention Kit, LED Light Kit, Arm Rest Seat Upgrade, Top Dressing Brush Kit, Inner Spike-Air Kit, Tournament Roll Kit, Pedal Extensions

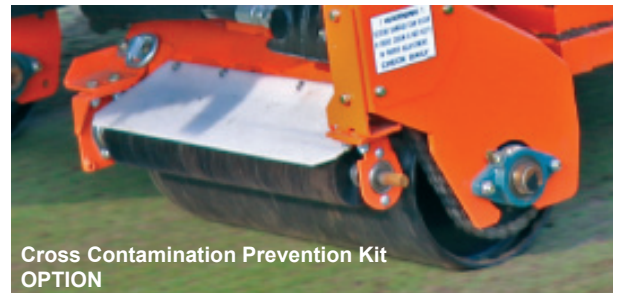

Cross Contamination Prevention Kit  
OPTION

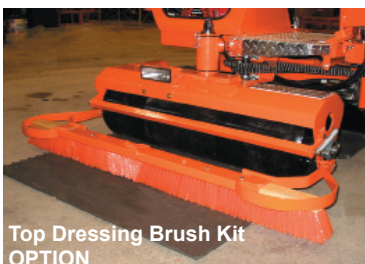

Top Dressing Brush Kit  
OPTION

Brushing sand after top dressing is easily performed with the optional Top Dressing Brush Kit. Sand will be evenly dispersed across greens.



Pedal Extensions  
OPTION

Pedal Extensions allow employees with shorter legs to remain fully seated, engaging the seat switch, while still being able to reach the pedals.



Inner Spike-Air Kit  
OPTION

The optional Inner Spike-Air Kit, when used on the green, will gently spike the green to allow water and oxygen to penetrate through the crust to the roots of the plant.

Cross Contamination Prevention Kit not only prevents the spread of disease or insects when rolling multiple areas, grass clippings will not clump on the end of the rolls, eliminating clean up. When used after top dressing, sand will disperse evenly across greens.

**"We are very pleased, the HP11 is straight forward, easy to operate and work on."** Portland Country Club, Falmouth, ME

**Salsco, INC.**  
LEADER BY DESIGN

*Quality of Workmanship, Innovative Design, Built to Last!*

SPECIFICATIONS AND OPTIONS - MODEL HP11 GAS ROLLER	
<b>WARRANTY:</b>	5 Year Limited Warranty
<b>ENGINE:</b>	13HP Honda, electric start. Rubber mounted to reduce vibration.
<b>FUEL TANK:</b>	Provided with engine. 1.6 gallons.
<b>CONTROLS:</b>	On/Off Switch, choke and fuel.
<b>HOURLY METER:</b>	Standard
<b>BATTERY:</b>	12 Volt, 245 CCA automotive type.
<b>ENGINE COOLING FAN:</b>	Standard
<b>SEAT:</b>	Molded cushion with protective edge trim, neutral safety switch & forward/reverse adjustment. Rubber mounted to reduce vibration.
<b>STEERING SYSTEM:</b>	Both rolls articulate & oscillate to smooth the surface of the green without changing the undulations designed into the green.
<b>STEERING WHEEL:</b>	13-1/4" diameter, automotive type, tilt steering wheel. 13-1 ratio
<b>MAIN FRAME:</b>	2-1/2" x 2-1/2" x 1/4" steel square tube. Fully gusseted with continuous welds.
<b>DRIVE ROLLS:</b>	2 - Oscillating steel rolls, both driven for positive traction. 1-1/4" roll mounting bearing. 10-3/4" diameter, 36" long with beveled ends & scrapers. Rolls are machined to within two thousandths of an inch concentricity.
<b>TRACTION DRIVE:</b>	Hydraulic pump to 2 hydrostats - 1 to each roll. Chain drive from hydraulic motors to rolls. #50 chain & sprockets.
<b>CLIMBING TRACTION:</b>	Up to 40°
<b>BRAKES:</b>	Hydrostatic
<b>HYDRAULIC COMPONENTS:</b>	<b>Hoses:</b> SAE JIC hose ends & fittings. 3,000 P.S.I. working & 12,000 P.S.I. burst. <b>Motors:</b> Two (2) hydraulic motors, Disp. 7.3 cubic inch displacement. <b>Pump:</b> One (1) hydraulic pump, 62 cubic inch displacement, with return to neutral assembly. 25 micron filter. 5 gallon hydraulic oil capacity.
<b>ROLLING SWATH:</b>	36"
<b>SPEED:</b>	Variable, 0–11.9 MPH
<b>GROUND PRESSURE:</b>	4.2 P.S.I. without water, 5.6 P.S.I. with water.
<b>TRANSPORT TRAILER:</b>	<b>Axle:</b> Spindle type with greaseable hub assemblies. <b>Tire/Wheel assemblies:</b> 18.5 X 8.5-8 load range "C", 6 ply, rated 935 lbs. <b>Hitch:</b> Tractor type hitch. <b>Jack:</b> 1000 lbs. side crank with swivel wheel. Full rubber mat in box and on tailgate.
<b>GUARDS/DECALS:</b>	All moving parts guarded. Full set of safety decals.
<b>PAINT:</b>	<b>Roller:</b> Orange, <b>Trailer:</b> Black. Polyester powder coat paint provides excellent outdoor weatherability and offers protection against ultraviolet discoloration. All parts painted separately.
<b>ROLLER OPTIONS:</b>	Cross Contamination Prevention Kit, LED Light Kit, Top Dressing Brush Kit, Outer or Inner Spike-Air Kit, Tournament Roll Kit, Arm Rest Seat Upgrade, Pedal Extensions.
<b>ROLLER DIMENSIONS:</b>	Length: 3'3" Width: 3'3" Height: 3'9" Weight: 604 lbs.
<b>TRAILER DIMENSIONS:</b>	Length: 4' Width: 3'6" Side Rails:10" Hitch Height:16" Weight: 197 lbs.

Specifications & Options Subject to Change Without Notice

Rev. 9/10/2021

## MANUFACTURER OF OUTDOOR POWER EQUIPMENT

Products for Turf & Lawn care, Rental, Construction, Tree Care, Wood Processing, Nursery & Farm Industries

**3-1/2" - 18" Capacity, Gas, Diesel, & PTO Wood/Brush Chippers - Slab Chippers**  
**Gas, Electric & Tow Behind Rollers - Tranz-Former Roller - CRV Core Recovery Vehicle**  
**Mini-Paver - Mini-Track Paver - Cobra Curbers - Scorpion Router - Concrete Paver**  
**Chipper Shredder Vacuums - Tailgate & Truckloader Vacuums**

**9 cu. yds. - 50 cu. yds. Per Hour, Electric, PTO & Diesel Powered Shaving Mills**

**Salsco, INC.**  
 LEADER BY DESIGN

105 Schoolhouse Road  
 Cheshire, CT 06410 U.S.A.  
 800-872-5726 (Toll Free), 203-271-1682, 203-271-2596 (Fax)  
[www.salsco.com](http://www.salsco.com), [sales@salsco.com](mailto:sales@salsco.com)