

8640 KTC TRACK CHIPPER

SALSCO

TRACK DRIVEN ALL-TERRAIN WOOD CHIPPER

Chips Down. The Ultimate Go-Anywhere Workhorse.

The 8640 KTC Track Chipper offers unmatched convenience and efficiency, allowing operators to bring the chipper directly to the worksite. Its compact 35" width fits through backyard gates, while rubber tracks provide excellent traction on hills, mud, and uneven ground—all without damaging lawns or paved surfaces.

With a 6" round wood capacity and powerful 49HP engine, the 8640 makes quick work of brush and branches. Built-in safety features and user-friendly controls ensure reliable performance in even the toughest environments.

Top Reasons to Choose the Track Chipper:

Go-Anywhere Mobility – Rubber tracks and a 35" width let the chipper access tight spaces and tough terrain without damaging surfaces.

High-Capacity Chipping – Handles branches up to 6" round with a wide infeed, delivering fast and efficient performance.

Safety and Control – Built-in safety features and easy-access controls keep operation simple and secure.



Heavy Duty Track

The heavy-duty rubber tracks offer excellent traction on hills and rough terrain. Their turf-friendly design prevents damage to lawns, driveways, and sidewalks—great for residential and rugged use.




Wide Infeed Hopper

The extra-wide infeed hopper with a 12" x 6" opening easily handles large, brushy material and branches, increasing efficiency and reducing prep time on the job.



Smart Safety Systems

The smart safety systems include an electric safety switch, neutral safety locks, and optional speed sensing with a safety stop button—protecting the operator and ensuring safe, smooth operation.

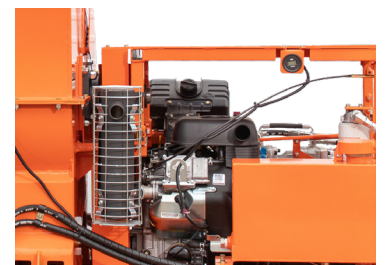

Engine

The Kohler 49HP is a robust 3-cylinder, FT4-compliant diesel engine. Engineered for durability and fuel efficiency, it features turbocharging and common rail direct injection for optimal performance and reduced emissions.



©2025 Salsco A Foley Company. All Rights Reserved

LEADER BY DESIGN | [SALSCO.COM](https://www.salsco.com)

8640 KTC TRACK CHIPPER



Product Specifications	
Length	120" in (305cm)
Width	35" in (89cm)
Height	96" in (245cm)
Weight	3,680 lbs (1669kg)
Standard Equipment	
Engine Options	Kohler 49HP FT4 diesel engine.
Clutch	Stein Clutch
Battery	12 volt, CCA 650, automotive type, lockable box ???
Fuel Tank	7" x 31-7/8" x 22" steel tank. 20.5 gallon capacity, with lockable filler cap with dip stick.
Hydraulic Tank	7" x 18" x 10-7/8" steel tank. 4.6 gallon capacity, with lockable filler cap with dip stick.
Hydraulic Componenets	Hoses: SAE JIC hose ends & fittings. 3,000 P.S.I. working, 12,000 P.S.I. burst. Motors - Two (2), Char-Lynn 29.4 displacement, one (1) Char-Lynn 17.9 displacement. Pump - Hydro-Gear, variable speed piston type tandem pump.
Infeed Opening	6" high x 12" wide opening at the infeed.
Infeed Tray	Extra wide, 57" wide x 33" high, 1/4" thick steel plate sides, with fold down infeed tray. Control bar positioned at top of infeed tray to control movement of the feed roll. High speed, low speed, neutral & reverse.
Exhaust Chute	360° hand crank, height adjustable exhaust chute with easy adjust exhaust directional flap.
Feed Roll	One (1), 7" long x 12" diameter, weighted, replaceable blades, fully welded.
Impeller Housing	1/4" thick steel, impeller housing is vented to provide more air flow for chip exhaust. Electric safety lock.
Impeller	Fully balanced, 1" thick x 26" diameter steel impeller with four (4) welded and gusseted exhaust paddles. 200 lbs. (Approximately)
Chip Blades	Four (4), 1/2" thick x 5" long x 4" wide, double-sided.
Bed Knives	Two (2), one horizontal, one vertical. Both are 1" thick steel, replaceable, sharpenable & adjustable
Bearings	4-bolt, heavy duty, cast iron, greaseable & self-centering.
Frame	Single piece welded box construction, 3/8" plate.
Tracks	Two (2), Bridgestone rubber tracks.
Options	Speed sensing
Transport Trailer	
Length	69" in (175cm)
Width	120" in (305cm)
Height	69" in (175cm)



ID:191017361063

8640 KTC TRACK CHIPPER



Transport Trailer (cont)	
Tongue	2" x 3" x 1/4" wall, rectangular steel tube. Bolt on tongue bracket is 1/2" steel plate bracket with 1/4" gussets.
Hitch	Adjustable height hitch. 2-5/16" ball or 3" pintle coupler.
Jack	Side-wind swivel snap ring mount jack. 2,000lb. lift capacity.
Weight	800 lbs (363kg)
Transport Trailer Standard Features	
Axle	3,500 lb. Torflex axle, features an independent suspension, cushioned with rubber, providing a smooth, quiet ride with no transfer of road shock from one wheel to the other.
Tires/Wheels	Two (2), ST225/80R16 LR "E", 10 Ply.
Tongue	2" x 3" x 1/4" wall, rectangular steel tube. Bolt on tongue bracket is 1/2" steel plate bracket with 1/4" gussets.
Hitch	Adjustable height hitch. 2-5/16" ball or 3" pintle coupler.
Jack	Side wind swivel snap ring mount jack. 2,000 lb. lift capacity.
Locking Pin	Locking pin to accommodate 3" pintle coupler, welded to the chipper.
Fenders/Lights	Extra heavy duty 1/4" thick diamond plate fenders with safety light guards. LED light package, D.O.T. approved.
Frame	Welded structural steel. 3" x 2" x 1/4" wall rectangular steel tube, continuous welds for strength and gus-seted where needed.
Paint	Black, polyester powder coat paint provides excellent outdoor weatherability and offers protection against ultraviolet discoloration. All parts painted separately.



ID:191017361063