

TPC-48 Mini Track Paver

SALSCO

SIDEWALKS CART PATHS TRENCHES



The TPC-48 Mini-Track Paver is Durable and Efficient

The Salsco TPC-48 Mini Concrete Paver. A highly versatile and efficient mini- asphalt paver engineered for sidewalks, cart paths, trails and more. Designed with service and maintenance in mind, the TPC-48 features a clean, simple design and extra-large drive motors to ensure years of reliable performance.


The TPC-48 is specifically designed to drop into a 48-inch trench, making it an ideal choice for contractors looking for efficiency and precision in confined spaces.

Attachments To Enhance Paving Performance:

Mold Extensions – Expands the paving width up to 6 feet for larger scale projects.

Cutoff Plates – Enables paving widths as narrow as 6 inches, perfect for fine detail work.

Hopper Panel Extensions – Panel extensions are available to protect from spillage of material. The option also protects the motor by keeping material away from vital engine components.

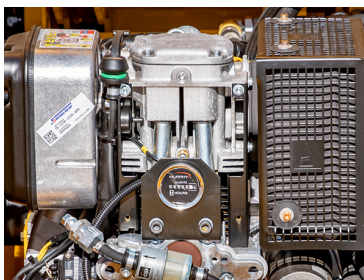

14 HP Hatz Diesel

The Hatz 1D81Z-9221 Diesel Engine delivers 14 HP of reliable power with electric start and is EPA Tier IV compliant, ensuring efficiency and reduced emissions.



Heavy Duty Track

Bridgestone extreme-duty rubber tracks, fixed 38" drive tread for screed compatibility. The hydrostatic drive motor enables smooth variable forward and reverse control for precise operation.



Paving Width

The TPC-48 Track Paver has a standard paving width ranging from 48" to 72"; Salsco provides models in 4', 5', and 6' versions that are interchangeable with other units.



Hydraulic Hopper

Extra-large hopper can be raised hydraulically to ensure that all material is used for paving. The feature is also used so the machine can be driven onto a ramp.



TPC-48 Mini Track Paver



Product Specifications	
Length	112" in (285cm)
Width	44" in (112cm)
Height	47" in (119cm)
Weight	4,400 lbs (1996kg)
Standard Equipment	
Engine	Hatz 1D81Z Diesel Engine Electric Start EPA Tier IV 14 HP
Pump	Dual hydrostatic, variable speed
Hoses	SAE JIC hose ends & fittings. 3,000 P.S.I., working, 12,000 P.S.I., burst.
Battery	12 volt, automotive type, 850 CCA.
Fuel Tank	Steel, 8.9 gallon capacity
Hydraulic Tank	Steel 8 gallon capacity
Hopper	Dual hopper, 1/4" thick, steel plate. Inside hopper tilts to 52° angle for ease of dumping material. 1.85 sq. yd. capacity
Screed	40" wide, with crown/invert adjustment, power end gates and end gate adjustment plates for uniform texture.
Auger Assembly	Two (2) 9" cast augers, with independent hydraulic drive, forward and reverse.
Drive	Hydrostatic; variable forward and reverse
Track Assembly	Heavy duty Bridgestone tracks. Tracks are fixed at 38" to accommodate screed style.
Controls	All controls are located at the rear of the machine over the screed, for ease of operation.
Paving Speed	0 - 25' +, per minute
Paving Width	48" to 72". 4', 5' and 6' models available. Can be interchanged.
Main Frame	One (1) piece, 1/4" thick steel main frame. 2" x 2" square tubing supports
Welds	Continuous welds where needed for durability
Optional Equipment	
Mold Extensions	Screed Extensions
Hopper Extensions	Hopper Panel Extensions
Hopper Plate	Hopper Cut Off Plates



ID:187671975036